

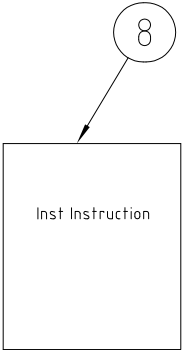


洛克赛克保留所有权利。未经授权严禁复制，使用以及向第三方泄漏。



All rights reserved. Unauthorized reproduction, use or disclosure to third parties is strictly forbidden.

TYPE	A	B	C	D	SW	F (PCS.)
RS 225	150.6	181	225	4	10	10
RS 250	175.6	206	250	4	10	10
RS 300	205.6	236	300	5	13	10
RS 350	244.2	286	350	5	13	12
RS 400	294.2	336	400	6	13	12
RS 450	344.2	386	450	6	17	12
RS 500	394.2	436	500	8	17	12
RS 550	444.2	486	550	8	17	12
RS 600	494.2	536	600	8	17	14
RS 644	538.2	580	644	8	17	14

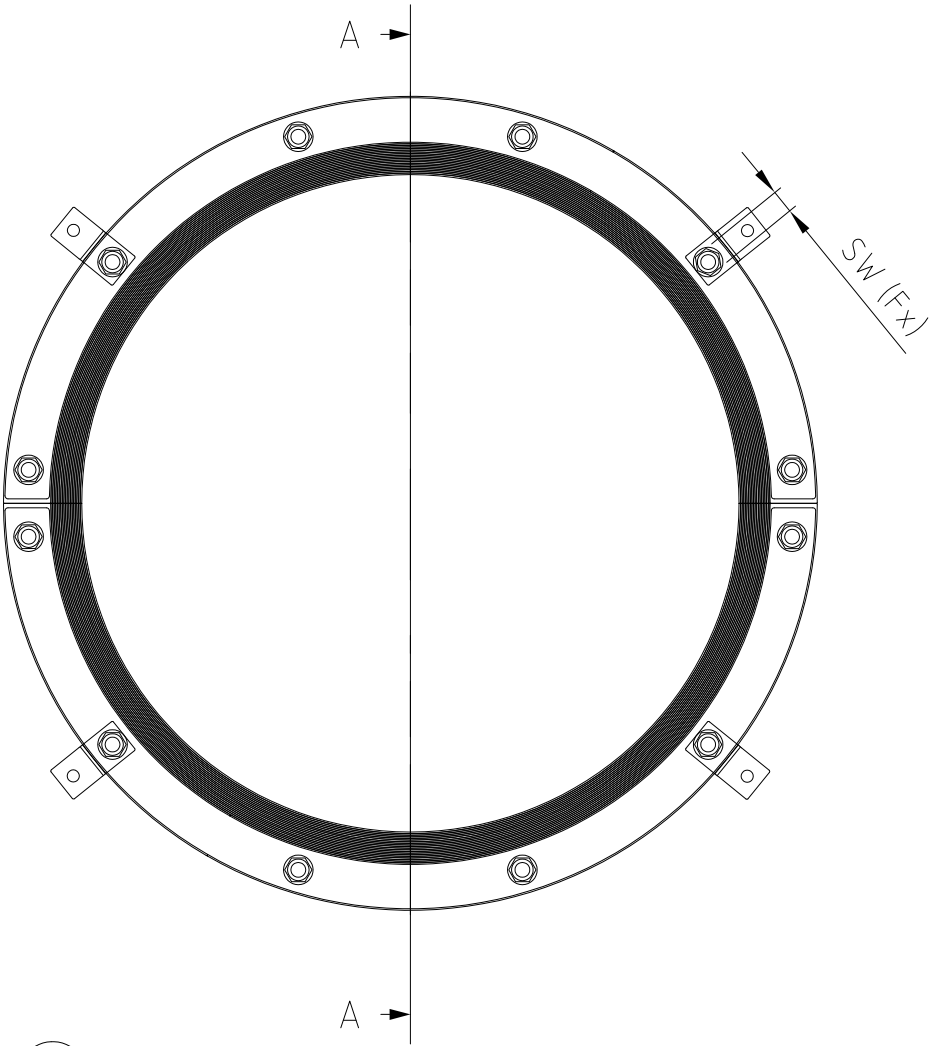

F	ITEMS 8 & 9 ADDED, INCH DIMENSIONS DELETED	2014-03-03	se-emikul
Rev	Type of revision	Date	Sign

SHARP EDGES BROKEN

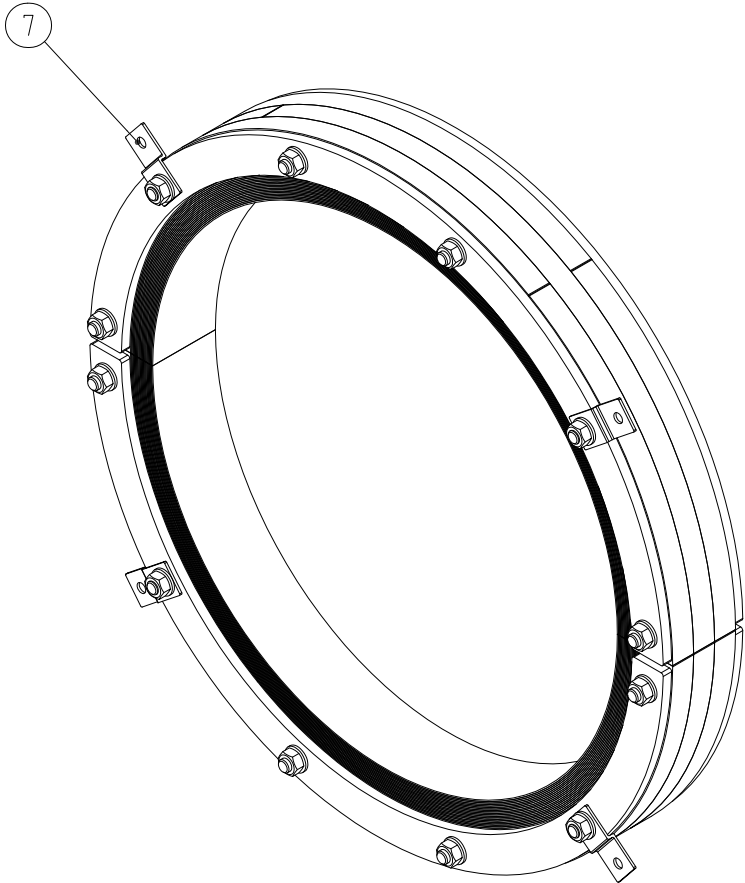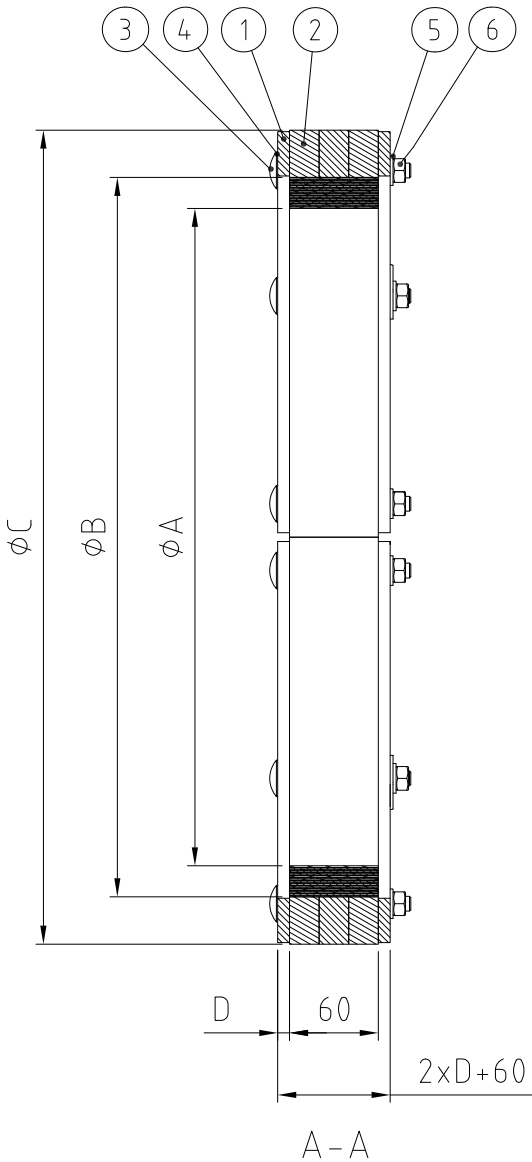

9	1	LUBRICANT	25 ml	-					
8	1	INSTALLATION INSTRUCTION		-					
7	4	STOP FLANGE (OPTIONAL)	S1020239/S1020240	-					
6	12	NUT	M6M	-					
5	12	WASHER	RB	-					
4	12	MVBF GASKET	EPDM	-					
3	12	SCREW	MVBF	-					
2	6	RUBBER	ROXYLON t=20mm	-					
1	4	FITTING	AISI 316	-					
Item	Qty	Designation	Specification	NetWeight					
General tolerance ISO 2768-1/2-m/K EN ISO 13920-BF	Welded details EN ISO 5817-B EN ISO 10042-B	General surface roughness, Ra 12,5	Designed by se-jenboh	Created Date 2004-08-30	Approved by se-jenboh	Approved Date 2014-03-19	Format A3	Scale 1:5	TotWeight
 www.roxtec.com			Title RS 225-644 ASSEMBLY						Projection method 
			Restricted due to Information Drawing			Drawing number S1006598			Rev F